


СВЕРЛА СПИРАЛЬНЫЕ С ЦИЛИНДРИЧЕСКИМ ХВОСТОВИКОМ ОБЩЕГО НАЗНАЧЕНИЯ

ДЛИННАЯ СЕРИЯ

ГОСТ 886-77
КЛАСС ТОЧНОСТИ А1
(DIN 340R Type N)

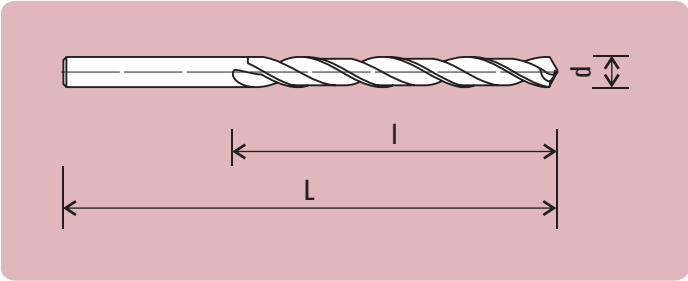

СЦП886А1

БЕЗ покрытия

TiN

Паро-оксидирование

Р6М5

Р6М5К5

Р18

118°

Ø1.0...1.95

Ø2...13

> Ø13

Р

К

Vp/S
стр.22

СЦП886А1					
d h8	l	L	d h8	l	L
1.00	33	56	4.20	78	119
1.10	37	60	4.25	78	119
1.20	41	65	4.30	82	126
1.30	41	65	4.40	82	126
1.40	45	70	4.50	82	126
1.50	45	70	4.60	82	126
1.60	50	76	4.70	82	126
1.70	50	76	4.80	87	132
1.80	53	80	4.90	87	132
1.90	53	80	5.00	87	132
1.95	56	85	5.10	87	132
2.00	56	85	5.20	87	132
2.05	56	85	5.30	87	132
2.10	56	85	5.40	91	139
2.15	59	90	5.50	91	139
2.20	59	90	5.60	91	139
2.25	59	90	5.70	91	139
2.30	59	90	5.80	91	139
2.35	59	90	5.90	91	139
2.40	62	95	6.00	91	139
2.45	62	95	6.10	97	148
2.50	62	95	6.20	97	148
2.55	62	95	6.30	97	148
2.60	62	95	6.40	97	148
2.65	62	95	6.50	97	148
2.70	66	100	6.60	97	148
2.75	66	100	6.70	97	148
2.80	66	100	6.80	102	156
2.85	66	100	6.90	102	156
2.90	66	100	7.00	102	156
2.95	66	100	7.10	102	156
3.00	66	100	7.20	102	156
3.10	69	106	7.30	102	156
3.15	69	106	7.40	102	156
3.20	69	106	7.50	102	156
3.30	69	106	7.60	109	165
3.35	69	106	7.70	109	165
3.40	73	112	7.80	109	165
3.50	73	112	7.90	109	165
3.60	73	112	8.00	109	165
3.70	73	112	8.10	109	165
3.80	78	119	8.20	109	165
3.90	78	119	8.30	109	165
4.00	78	119	8.40	109	165
4.10	78	119	8.50	109	165

СВЕРЛА СПИРАЛЬНЫЕ С ЦИЛИНДРИЧЕСКИМ ХВОСТОВИКОМ ОБЩЕГО НАЗНАЧЕНИЯ

СЦП886А1					
d	l	L	d	l	L
h8			h8		
8.60	115	175	13.10	134	205
8.70	115	175	13.20	134	205
8.80	115	175	13.30	140	214
8.90	115	175	13.50	140	214
9.00	115	175	13.70	140	214
9.10	115	175	13.75	140	214
9.20	115	175	13.80	140	214
9.30	115	175	13.90	140	214
9.40	115	175	14.00	140	214
9.50	115	175	14.25	144	220
9.60	121	184	14.50	144	220
9.70	121	184	14.75	144	220
9.80	121	184	15.00	144	220
9.90	121	184	15.25	149	227
10.00	121	184	15.40	149	227
10.10	121	184	15.50	149	227
10.20	121	184	15.75	149	227
10.30	121	184	16.00	149	227
10.40	121	184	16.25	154	235
10.50	121	184	16.50	154	235
10.60	121	184	16.75	154	235
10.70	128	195	17.00	154	235
10.80	128	195	17.25	158	241
10.90	128	195	17.40	158	241
11.00	128	195	17.50	158	241
11.10	128	195	17.75	158	241
11.20	128	195	18.00	158	241
11.30	128	195	18.25	162	247
11.40	128	195	18.50	162	247
11.50	128	195	18.75	162	247
11.60	128	195	19.00	162	247
11.70	128	195	19.25	166	254
11.80	128	195	19.40	166	254
11.90	134	205	19.50	166	254
12.00	134	205	19.75	166	254
12.10	134	205	20.00	166	254
12.20	134	205			
12.30	134	205			
12.40	134	205			
12.50	134	205			
12.60	134	205			
12.70	134	205			
12.80	134	205			
12.90	134	205			
13.00	134	205			

ДЛЯ ЗАМЕТОК

Пример заказа (стр. 4):
СЦП886А1 d P6M5 TiN