


СВЕРЛА СПИРАЛЬНЫЕ С КОНИЧЕСКИМ ХВОСТОВИКОМ ОБЩЕГО НАЗНАЧЕНИЯ

ДЛИННАЯ СЕРИЯ

КЛАСС ТОЧНОСТИ В
ГОСТ 12121-77

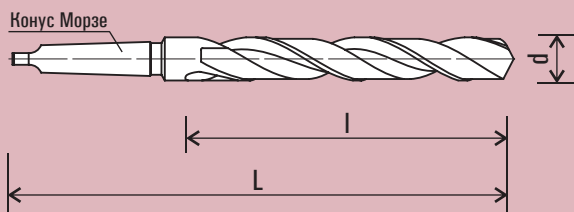

СК12121

БЕЗ
покрытия

Паро-
оксидиро-
вание

СК12121

d	I	L	Конус Морзе	d	I	L	Конус Морзе
h9				h9			
6.00	80	161	1	16.00	153	251	2
6.20	86	167	1	16.25	159	257	2
6.40	86	167	1	16.50	159	257	2
6.50	86	167	1	16.75	159	257	2
6.60	86	167	1	17.00	159	257	2
6.80	93	174	1	17.25	165	263	2
7.00	93	174	1	17.40	165	263	2
7.20	93	174	1	17.50	165	263	2
7.40	93	174	1	17.75	165	263	2
7.50	93	174	1	18.00	165	263	2
7.60	100	181	1	18.25	171	269	2
7.80	100	181	1	18.50	171	269	2
8.00	100	181	1	18.75	171	269	2
8.20	100	181	1	19.00	171	269	2
8.40	100	181	1	19.25	177	275	2
8.50	107	183	1	19.40	177	275	2
8.80	107	183	1	19.50	177	275	2
9.00	107	183	1	19.75	177	275	2
9.20	107	183	1	20.00	177	275	2
9.50	107	188	1	20.25	184	282	2
9.80	116	197	1	20.50	184	282	2
10.00	116	197	1	20.75	184	282	2
10.20	116	197	1	20.90	184	282	2
10.50	116	197	1	21.00	184	282	2
10.80	125	206	1	21.25	191	289	2
11.00	125	206	1	21.50	191	289	2
11.20	125	206	1	21.75	191	289	2
11.50	125	206	1	22.00	191	289	2
11.80	125	206	1	22.25	191	289	2
12.00	134	215	1	22.50	198	296	2
12.20	134	215	1	22.75	198	296	2
12.50	134	215	1	23.00	198	296	2
12.80	134	215	1	23.25	198	319	2
13.00	134	215	1	23.50	198	319	2
13.50	142	223	1	23.75	206	327	2
13.75	142	223	1	24.00	206	327	2
14.00	142	223	1	24.25	206	327	3
14.25	147	245	2	24.50	206	327	3
14.50	147	245	2	24.75	206	327	3
14.75	147	245	2	25.00	206	327	3
15.00	147	245	2	25.25	214	335	3
15.25	153	251	2	25.50	214	335	3
15.50	153	251	2	25.75	214	335	3
15.75	153	251	2	26.00	214	335	3

P6M5

P6M5K5

P18



P

K

Vp/S
стр.43



СВЕРЛА СПИРАЛЬНЫЕ С КОНИЧЕСКИМ ХВОСТОВИКОМ ОБЩЕГО НАЗНАЧЕНИЯ

СК12121			
d h9	I	L	Конус Морзе
26.25	214	335	3
26.50	214	335	3
26.75	222	343	3
27.00	222	343	3
27.25	222	343	3
27.50	222	343	3
27.75	222	343	3
28.00	222	343	3
28.25	230	351	3
28.50	230	351	3
28.75	230	351	3
29.00	230	351	3
29.25	230	351	3
29.50	230	351	3
29.75	230	351	3
30.00	230	351	3

ДЛЯ ЗАМЕТОК

Пример заказа (стр. 5):
СК12121 d P6M5



В таблицах представлены стандартные позиции.
По заказу возможно изготовление инструмента
с другими конструктивными размерами,
геометрическими параметрами, износостойкими
покрытиями



**ТОМСКИЙ
ИНСТРУМЕНТ**