

СВЕРЛА С УСИЛЕННЫМ ХВОСТОВИКОМ ОБЩЕГО НАЗНАЧЕНИЯ


ГЛУБИНА СВЕРЛЕНИЯ 3хd

ТУ 25.73.40-033-88213844-2023

(ВЗАМЕН ТУ 25.73.40.112-026-88213844-2018)

ГАБАРИТНЫЕ РАЗМЕРЫ ПО DIN 6537K

ИСПОЛНЕНИЕ ХВОСТОВИКА ПО ГОСТ Р 52965-2008 (DIN 6535)

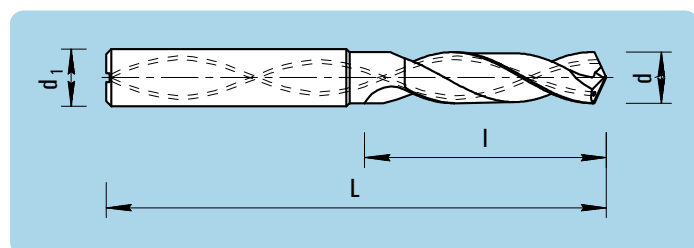


СЦЦ535

AlTiN



с каналами СОЖ*

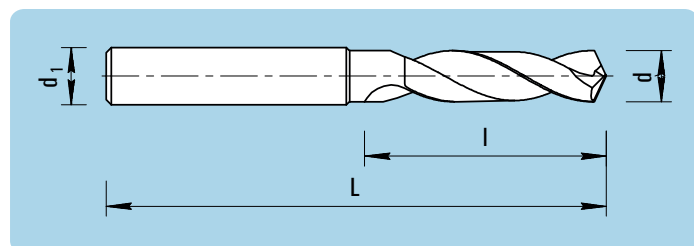


СЦЦ538

AlTiN




без каналов СОЖ*

*СОЖ - смазочно-охлаждающая жидкость



Опционально



СЦЦ535, СЦЦ538

d	l	L	d1	d	l	L	d1
h7			h6	h7			h6
3.00	20	62	6	11.00	55	102	12
3.15	20	62	6	11.50	55	102	12
3.30	20	62	6	11.90	55	102	12
3.50	20	62	6	12.00	55	102	12
3.70	20	62	6	12.10	60	107	14
3.75	20	62	6	12.45	60	107	14
3.80	24	66	6	12.50	60	107	14
4.00	24	66	6	12.70	60	107	14
4.20	24	66	6	12.95	60	107	14
4.50	24	66	6	13.00	60	107	14
4.75	24	66	6	13.50	60	107	14
4.80	28	66	6	13.90	60	107	14
4.95	28	66	6	14.00	60	107	14
5.00	28	66	6	14.10	65	115	16
5.20	28	66	6	14.45	65	115	16
5.50	28	66	6	14.50	65	115	16
5.95	28	66	6	14.95	65	115	16
6.00	28	66	6	15.00	65	115	16
6.10	34	79	8	15.35	65	115	16
6.50	34	79	8	15.45	65	115	16
6.70	34	79	8	15.50	65	115	16
6.95	34	79	8	15.90	65	115	16
7.00	34	79	8	15.95	65	115	16
7.10	41	79	8	16.00	65	115	16
7.50	41	79	8	16.10	73	123	18
7.70	41	79	8	16.45	73	123	18
7.95	41	79	8	16.50	73	123	18
8.00	41	79	8	16.95	73	123	18
8.10	47	89	10	17.00	73	123	18
8.45	47	89	10	17.35	73	123	18
8.50	47	89	10	17.50	73	123	18
8.70	47	89	10	17.90	73	123	18
8.95	47	89	10	18.00	73	123	18
9.00	47	89	10	18.10	79	131	20
9.45	47	89	10	18.45	79	131	20
9.50	47	89	10	18.50	79	131	20
9.95	47	89	10	18.95	79	131	20
10.00	47	89	10	19.00	79	131	20
10.10	55	102	12	19.35	79	131	20
10.45	55	102	12	19.50	79	131	20
10.50	55	102	12	19.90	79	131	20
10.70	55	102	12	20.00	79	131	20
10.95	55	102	12				

Пример заказа (стр. 12):
СЦЦ535 d*I*L*d1 HF AlTiN