


СВЕРЛА С УСИЛЕННЫМ ХВОСТОВИКОМ ОБЩЕГО НАЗНАЧЕНИЯ

ГЛУБИНА СВЕРЛЕНИЯ 7хd

ТУ 25.73.40-033-88213844-2023

(взамен ТУ 25.73.40.112-026-88213844-2018)

ИСПОЛНЕНИЕ ХВОСТОВИКА ПО ГОСТ Р 52965-2008 (DIN 6535)

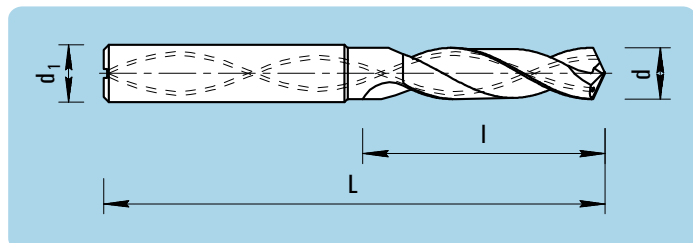

СЦЦ543


AlTiN




с каналами СОЖ*

*СОЖ - смазочно-охлаждающая жидкость

СЦЦ543							
d	l	L	d1	d	l	L	d1
h7			h6	h7			h6
3.00	32	72	6	11.00	104	151	12
3.15	32	72	6	11.50	104	151	12
3.30	32	72	6	11.90	104	151	12
3.50	32	72	6	12.00	104	151	12
3.70	32	72	6	12.10	113	160	14
3.75	32	72	6	12.45	113	160	14
3.80	39	79	6	12.50	113	160	14
4.00	39	79	6	12.70	113	160	14
4.20	39	79	6	12.95	113	160	14
4.50	39	79	6	13.00	113	160	14
4.75	39	79	6	13.50	113	160	14
4.80	53	93	6	13.90	113	160	14
4.95	53	93	6	14.00	113	160	14
5.00	53	93	6	14.10	128	178	16
5.20	53	93	6	14.45	128	178	16
5.50	53	93	6	14.50	128	178	16
5.95	53	93	6	14.95	128	178	16
6.00	53	93	6	15.00	128	178	16
6.10	60	105	8	15.35	128	178	16
6.50	60	105	8	15.45	128	178	16
6.70	60	105	8	15.50	128	178	16
6.95	60	105	8	15.90	128	178	16
7.00	60	105	8	15.95	128	178	16
7.10	67	105	8	16.00	128	178	16
7.50	67	105	8	16.10	135	185	18
7.70	67	105	8	16.45	135	185	18
7.95	67	105	8	16.50	135	185	18
8.00	67	105	8	16.95	135	185	18
8.10	78	120	10	17.00	135	185	18
8.45	78	120	10	17.35	135	185	18
8.50	78	120	10	17.50	135	185	18
8.70	78	120	10	17.90	135	185	18
8.95	78	120	10	18.00	135	185	18
9.00	91	133	10	18.10	148	200	20
9.45	91	133	10	18.45	148	200	20
9.50	91	133	10	18.50	148	200	20
9.95	91	133	10	18.95	148	200	20
10.00	91	133	10	19.00	148	200	20
10.10	93	140	12	19.35	148	200	20
10.45	93	140	12	19.50	148	200	20
10.50	93	140	12	19.90	148	200	20
10.70	93	140	12	20.00	148	200	20
10.95	93	140	12				



Опционально



Пример заказа (стр. 12):
СЦЦ543 d*I*L*d1 HF AlTiN