

ФРЕЗЫ ДЛЯ ТВЕРДОЙ ОБРАБОТКИ

2-Х ЗУБЬЕ РАДИУСНЫЕ С УСИЛЕННЫМ ХВОСТОВИКОМ


ТУ 25.73.40-029-88213844-2023

(ВЗАМЕН ТУ 3918-011-88213850-2010)

ИСПОЛНЕНИЕ ХВОСТОВИКА ПО ГОСТ Р 52965-2008 (DIN 6535)




ФРЦ4274						
d	d1	d2	l	l1	l2	L
h10	h6					
3.0	6	2.8	4	7	27	70
4.0	6	3.8	5	8	30	70
5.0	6	4.8	6	10	33	70
6.0	8	5.8	7	18	52	90
8.0	10	7.8	9	17	59	100
10.0	12	9.8	11	22	64	110
12.0	16	11.8	12	28	70.5	125
16.0	18	15.8	16	34	76.5	140

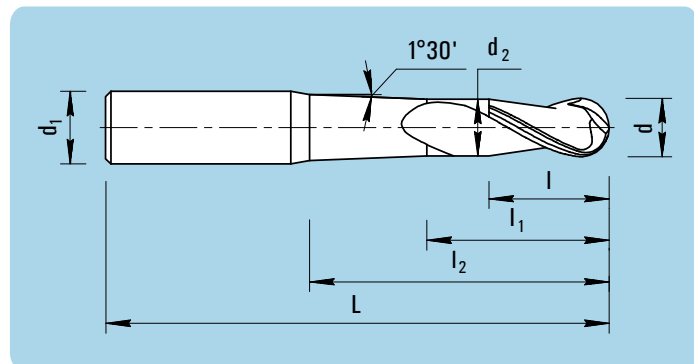


ФРЦ4274

AlTiSiN



длинная серия



Опционально



Назначение



ДЛЯ ЗАМЕТОК

Пример заказа (стр. 9):
ФРЦ4274 d*I*l1*L*d1 HF AlTiSiN