


ФРЕЗЫ СПЕЦИАЛЬНЫЕ

**2-Х ЗУБЫЕ С ПОЛИРОВАННОЙ КАНАВКОЙ
ДЛЯ ОБРАБОТКИ
ЦВЕТНЫХ МЕТАЛЛОВ И ЛЕГКИХ СПЛАВОВ**

ТУ 25.73.40-032-88213844-2023

(взамен ТУ 3918-012-88213850-2013)

ИСПОЛНЕНИЕ ХВОСТОВИКА ПО ГОСТ Р 52965-2008 (DIN 6535)

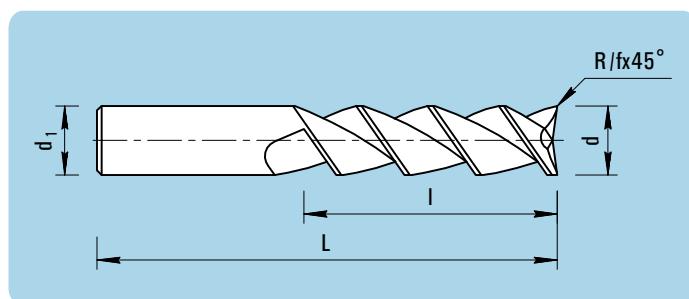

ФКЦ4463					ФКЦ4464				
d	d1	I	L	R	d	d1	I	L	R
h10	h6				h10	h6			
3.0	6	7	57	0.12	3.0	6	15	70	0.12
3.0	3	7	38	0.12	3.0	3	15	70	0.12
4.0	6	8	57	0.12	4.0	6	20	70	0.12
4.0	4	8	57	0.12	4.0	4	20	70	0.12
5.0	6	10	57	0.12	5.0	6	25	70	0.12
5.0	5	10	57	0.12	5.0	5	27	70	0.12
6.0	6	10	57	0.12	6.0	6	30	70	0.12
8.0	8	16	63	0.12	8.0	8	36	80	0.12
10.0	10	19	72	0.12	10.0	10	40	90	0.12
12.0	12	22	83	0.16	12.0	12	48	100	0.16
14.0	14	22	83	0.16	14.0	14	48	100	0.16
16.0	16	26	92	0.16	16.0	16	54	115	0.16
18.0	18	26	92	0.25	18.0	18	54	115	0.25
20.0	20	32	104	0.25	20.0	20	60	125	0.25

ФКЦ4463

по ГОСТ 32405, DIN 6527L

ФКЦ4464

средняя серия



БЕЗ покрытия



БЕЗ покрытия



ZrCN легкие сплавы



ZrCN легкие сплавы



AlTiSiN алюминиевые сплавы с Si > 11%



AlTiSiN алюминиевые сплавы с Si > 11%



HF




ИСП.1



ИСП.2



ИСП.3



55°




55°

Опционально



ИСП.2
 $\phi \leq 20$




R
 $R \leq 1/3d$

Назначение



AI



HF



Al



Vp/Sz

стр. 19

ДЛЯ ЗАМЕТОК

Пример заказа (стр. 8):
ФКЦ4463 d*I*L*d1 HF ZrCN

