


СВЕРЛА СПИРАЛЬНЫЕ С КОНИЧЕСКИМ ХВОСТОВИКОМ ОБЩЕГО НАЗНАЧЕНИЯ

СРЕДНЯЯ СЕРИЯ

КЛАСС ТОЧНОСТИ В
ГОСТ 10903-77

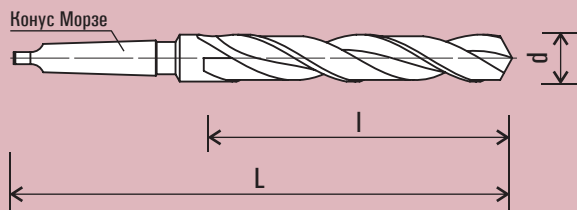

СК10903

БЕЗ
покрытия

Паро-
оксидиро-
вание




СК10903

d	I	L	Конус Морзе	d	I	L	Конус Морзе
h9				h9			
6.00	57	138	1	15.40	120	218	2
6.20	63	144	1	15.50	120	218	2
6.40	63	144	1	15.75	120	218	2
6.50	63	144	1	16.00	120	218	2
6.60	63	144	1	16.25	125	223	2
6.80	69	150	1	16.50	125	223	2
7.00	69	150	1	16.75	125	223	2
7.20	69	150	1	17.00	125	223	2
7.40	69	150	1	17.25	130	228	2
7.50	69	150	1	17.40	130	228	2
7.60	75	156	1	17.50	130	228	2
7.80	75	156	1	17.75	130	228	2
8.00	75	156	1	18.00	130	228	2
8.20	75	156	1	18.25	135	233	2
8.40	75	156	1	18.50	135	233	2
8.50	75	156	1	18.75	135	233	2
8.80	81	162	1	19.00	135	233	2
9.00	81	162	1	19.25	140	238	2
9.20	81	162	1	19.40	140	238	2
9.50	81	162	1	19.50	140	238	2
9.80	87	168	1	19.75	140	238	2
10.00	87	168	1	20.00	140	238	2
10.20	87	168	1	20.25	145	243	2
10.50	87	168	1	20.50	145	243	2
10.80	94	175	1	20.75	145	243	2
11.00	94	175	1	20.90	145	243	2
11.20	94	175	1	21.00	145	243	2
11.50	94	175	1	21.25	150	248	2
11.80	94	175	1	21.50	150	248	2
12.00	101	182	1	21.75	150	248	2
12.20	101	182	1	22.00	150	248	2
12.50	101	182	1	22.25	150	248	2
12.80	101	182	1	22.50	155	253	2
13.00	101	182	1	22.75	155	253	2
13.20	101	182	1	23.00	155	253	2
13.50	108	189	1	23.25	155	276	3
13.75	108	189	1	23.50	155	276	3
13.80	108	189	1	23.75	160	281	3
14.00	108	189	1	23.90	160	281	3
14.25	114	212	2	24.00	160	281	3
14.50	114	212	2	24.25	160	281	3
14.75	114	212	2	24.50	160	281	3
15.00	114	212	2	24.75	160	281	3
15.25	120	218	2	25.00	160	281	3

P6M5

P6M5K5

P18



P

K

Vp/S
стр.43



СВЕРЛА СПИРАЛЬНЫЕ С КОНИЧЕСКИМ ХВОСТОВИКОМ ОБЩЕГО НАЗНАЧЕНИЯ

СК10903											
d	I	L	Конус Морзе	d	I	L	Конус Морзе	d	I	L	Конус Морзе
h9				h9				h9			
25.25	165	286	3	38.00	200	349	4	63.00	240	427	5
25.50	165	286	3	38.25	200	349	4	64.00	245	432	5
25.75	165	286	3	38.50	200	349	4	65.00	245	432	5
26.00	165	286	3	39.00	200	349	4	66.00	245	432	5
26.25	165	286	3	39.25	200	349	4	67.00	245	432	5
26.50	165	286	3	39.50	200	349	4	68.00	250	437	5
26.75	170	291	3	40.00	200	349	4	69.00	250	437	5
27.00	170	291	3	40.50	205	354	4	70.00	250	437	5
27.25	170	291	3	41.00	205	354	4				
27.50	170	291	3	41.25	205	354	4				
27.75	170	291	3	41.50	205	354	4				
28.00	170	291	3	42.00	205	354	4				
28.25	175	296	3	42.50	205	354	4				
28.50	175	296	3	43.00	210	359	4				
28.75	175	296	3	43.25	210	359	4				
29.00	175	296	3	43.50	210	359	4				
29.25	175	296	3	44.00	210	359	4				
29.50	175	296	3	44.50	210	359	4				
29.75	175	296	3	45.00	210	359	4				
30.00	175	296	3	45.25	215	364	4				
30.25	180	301	3	45.50	215	364	4				
30.50	180	301	3	46.00	215	364	4				
30.75	180	301	3	46.50	215	364	4				
31.00	180	301	3	47.00	215	364	4				
31.25	180	301	3	47.50	215	364	4				
31.50	180	301	3	48.00	220	369	4				
31.75	185	306	3	48.50	220	369	4				
32.00	185	334	4	49.00	220	369	4				
32.25	185	334	4	49.50	220	369	4				
32.50	185	334	4	50.00	220	369	4				
33.00	185	334	4	50.50	225	374	4				
33.25	185	334	4	51.00	225	412	5				
33.50	185	334	4	51.50	225	412	5				
34.00	190	339	4	52.00	225	412	5				
34.50	190	339	4	53.00	225	412	5				
35.00	190	339	4	54.00	230	417	5				
35.25	190	339	4	55.00	230	417	5				
35.50	190	339	4	56.00	230	417	5				
35.75	195	344	4	57.00	235	422	5				
36.00	195	344	4	58.00	235	422	5				
36.25	195	344	4	59.00	235	422	5				
36.50	195	344	4	60.00	235	422	5				
37.00	195	344	4	61.00	240	427	5				
37.50	195	344	4	62.00	240	427	5				

ДЛЯ ЗАМЕТОК

Пример заказа (стр. 5):
СК10903 d P6M5



В таблицах представлены стандартные позиции.
По заказу возможно изготовление инструмента
с другими конструктивными размерами,
геометрическими параметрами, износостойкими
покрытиями



**ТОМСКИЙ
ИНСТРУМЕНТ**